


**FIBERRUNNER** channel installed to protect jumper cables exiting the FDF line-up should be installed to ensure that the transition from the horizontal run to the vertical jumper pathway on the FDF bay upright is as short and direct as possible. The transition, or spill-out, should be positioned so that the jumper cables deployed within the pathway can be easily accessed from the wiring aisle.



See page 2 for detail of typical FDF transition.

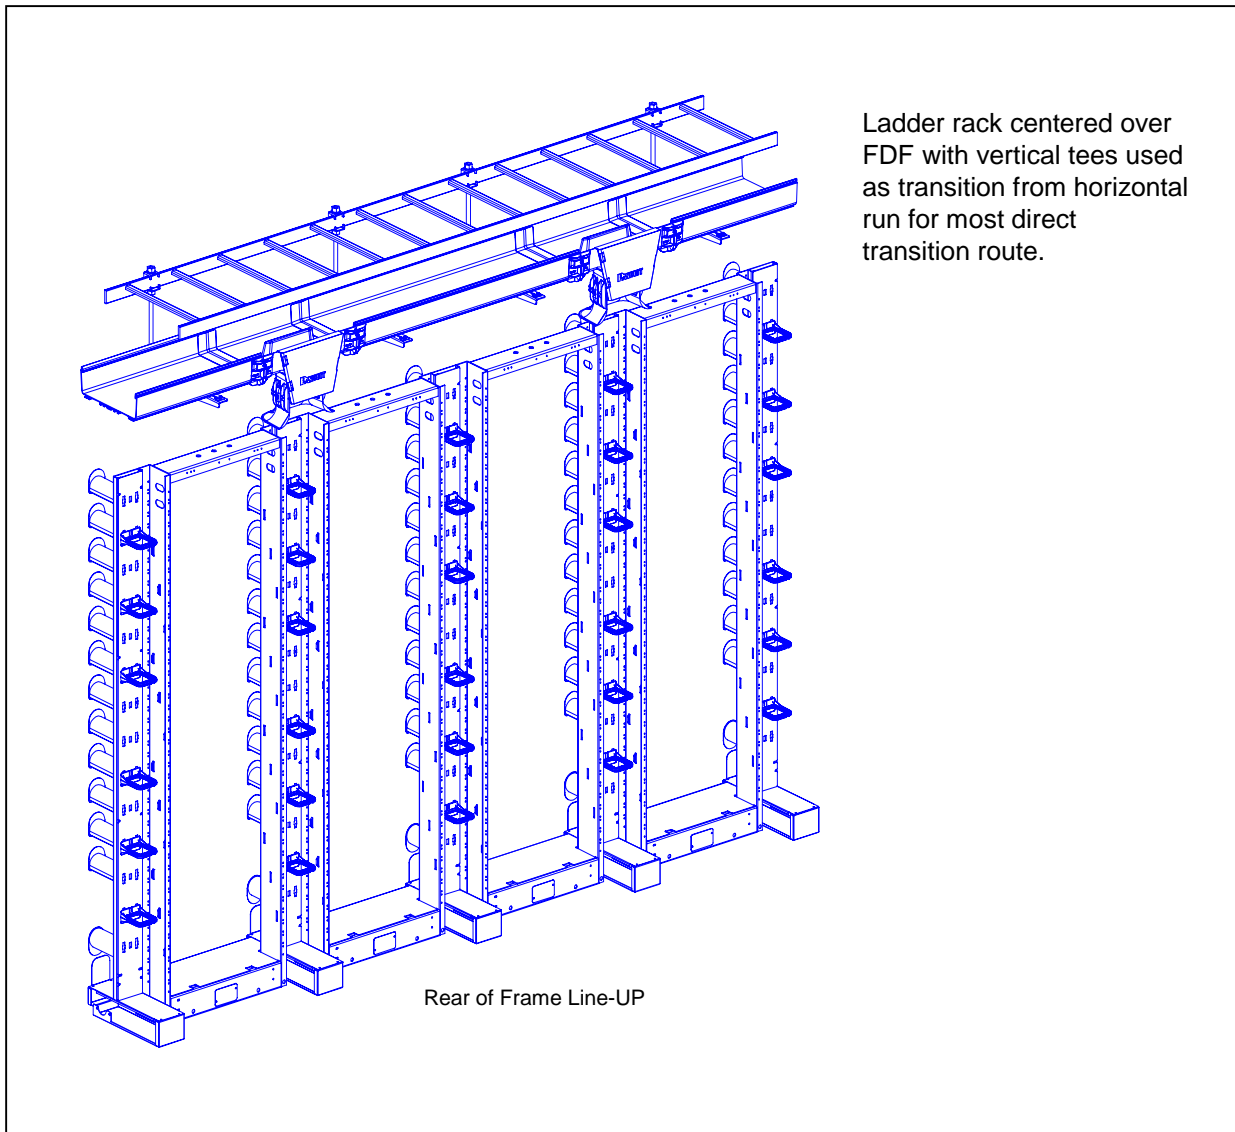