




## PUNCHDOWN IMPACT TOOLS

Part Numbers: PDT110, GPST

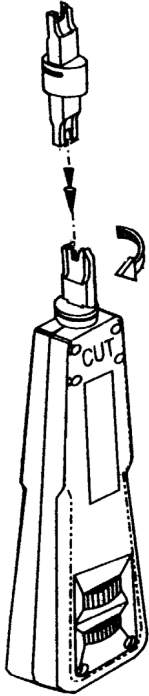


### BLADE INSTALLATION AND REMOVAL

- Align and insert blade; rotate  $\frac{1}{4}$  turn.
- To remove blade, reverse  $\frac{1}{4}$  turn and pull away from handle.

### SETTING IMPACT FORCE

- Rotate Impact Knob to "LO" for all 110 connector terminations.
- Rotate Impact Knob to "LO" for *GIGA-PUNCH™* connector seating (without cutting).
- Rotate Impact Knob to "HIGH" for *GIGA-PUNCH* connector seating and cutting.
- Rotate Impact Knob to "HIGH" for 22 gauge and larger gauge conductors.
- The wire is properly seated after snap action in the handle is activated.
- The blade can be reversed if the wire is not to be cut upon installation.

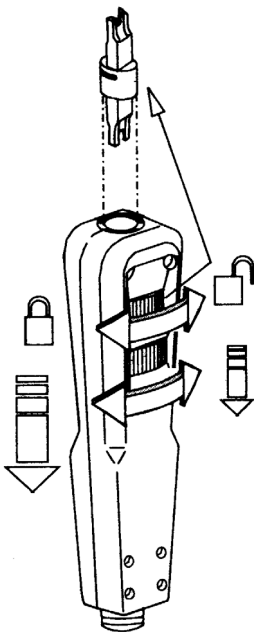

### BLADE STORAGE

- Insert blade in hole; rotate Release Knob to drop the blade in place. Release knob to lock blade in place.
- To remove the blade, invert tool and rotate Release Knob.

### BLADE REPLACEMENT PART NUMBERS

<u>Part Number</u>	<u>Description</u>
PDTH110	<i>PAN-PUNCH™</i> 110 REPLACEMENT BLADE
GPSTB	<i>GIGA-PUNCH</i> SINGLE TOOL REPLACEMENT BLADE

10500 W. 167<sup>th</sup> Street  
Orland Park, Illinois 60467

Phone: 888-506-5400, Ext. 6914  
Fax: 708-460-2897

Email: [info@panduit.com](mailto:info@panduit.com)  
Web Site: [www.panduit.com](http://www.panduit.com)

WORLDWIDE SUBSIDIARIES AND SALES OFFICES