


Ejemplo charola de 200 para 158 a 210 cables UTP cat 6

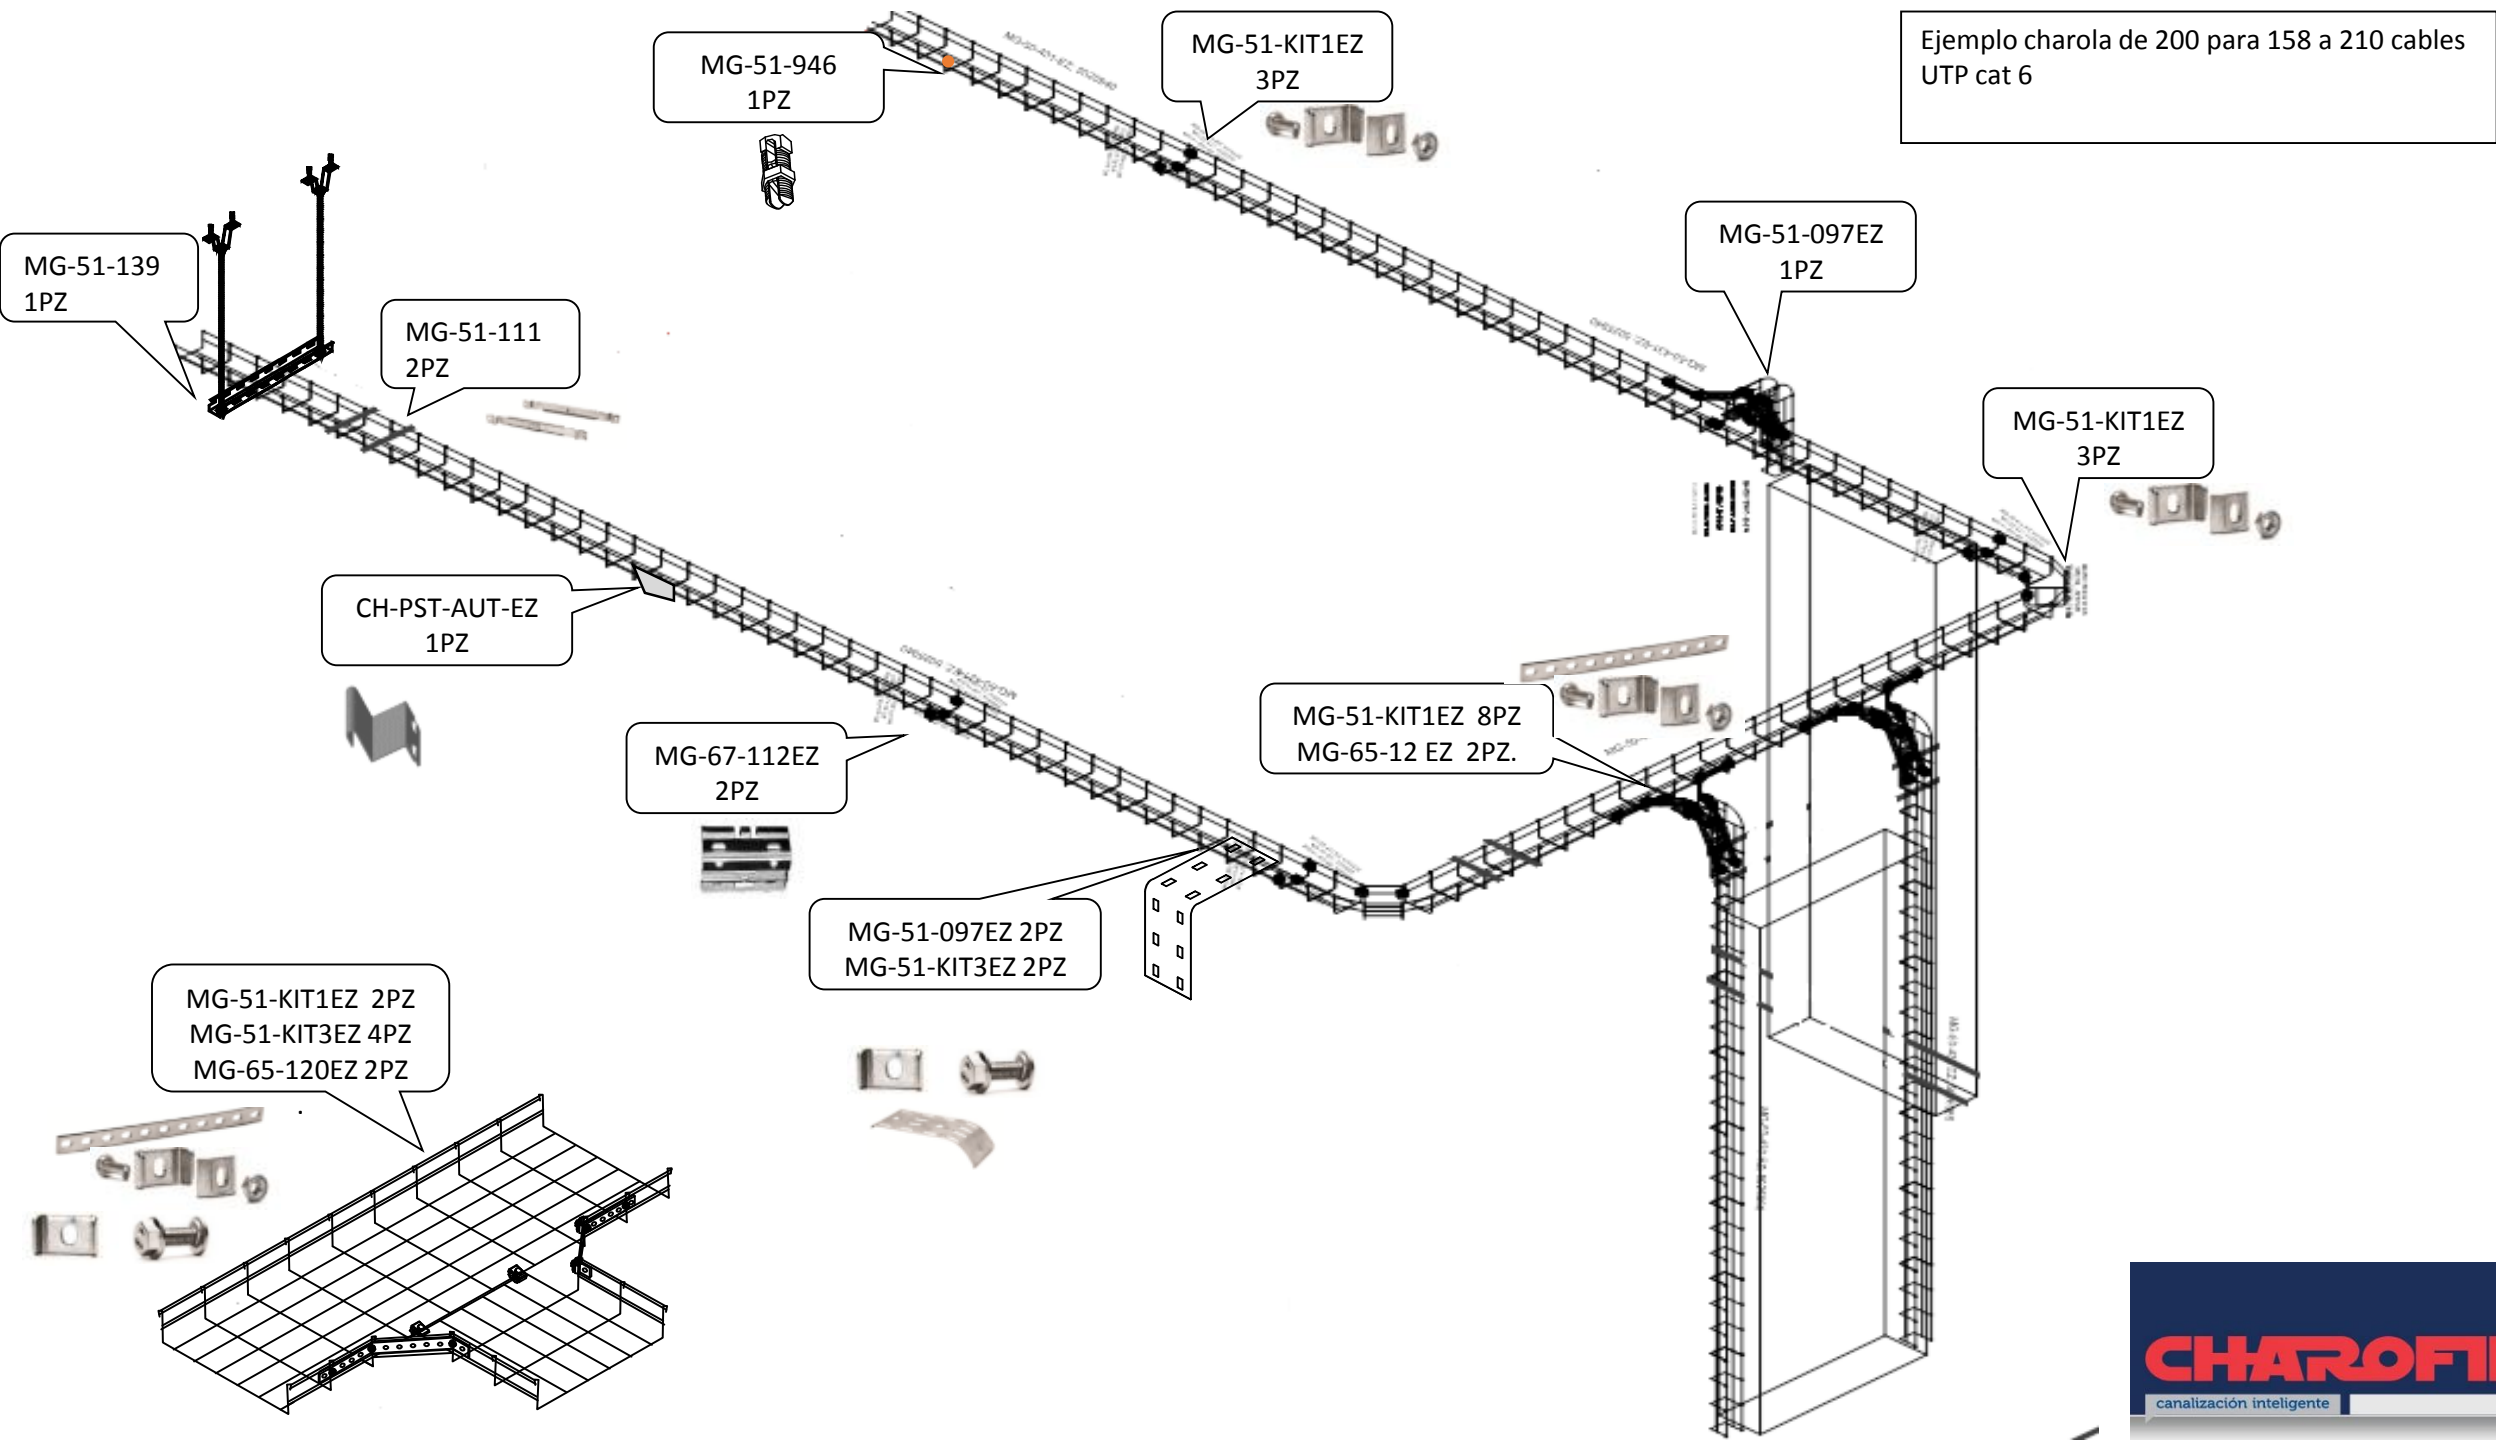


CAPACIDAD DE CABLEADO EN mm.

ALTO	Ancho	UTP CAT 6	UTP CAT 6A
33	50	0 - 26	0 - 16
	100	27 - 52	17 - 33
	150	53 - 78	34 - 49
	200	79 - 105	50 - 65
	300	106 - 157	66 - 98

ALTO	Ancho	UTP CAT 6	UTP CAT 6A
66	50	0 - 52	0 - 33
	100	53 - 105	34 - 65
	150	106 - 157	66 - 98
	200	158 - 210	99 - 130
	250	211 - 262	131 - 163
	300	263 - 315	164 - 195
	400	316 - 420	196 - 261
	500	421 - 525	262 - 326
	600	526 - 630	327 - 391
	700	630 - 635	392 - 456

ALTO	Ancho	UTP CAT 6	UTP CAT 6A
116	100	0 - 185	0 - 114
	150	186 - 276	115 - 172
	200	277 - 369	173 - 229
	300	370 - 553	230 - 343
	400	554 - 738	344 - 458
	500	739 - 923	459 - 572
	600	924 - 1007	573 - 687

ALTO	Ancho	UTP CAT 6	UTP CAT 6A
166	100	0 - 264	0 - 164
	150	265 - 398	164 - 246
	200	399 - 528	247 - 328
	250	529 - 660	329 - 410
	300	661 - 793	411 - 491
	400	794 - 1057	492 - 655
	500	1058 - 1321	656 - 819
	600	1322 - 1585	820 - 983

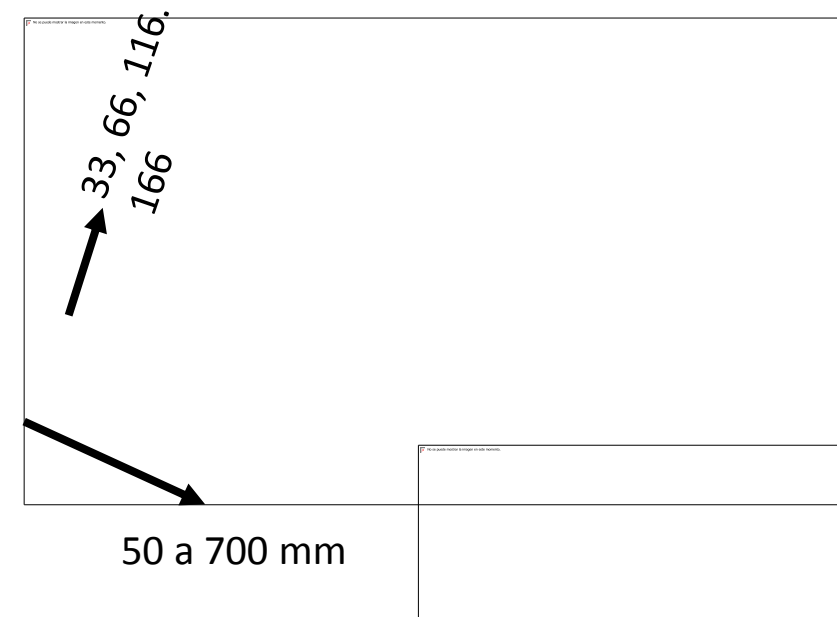


CAPACIDAD DE CABLEADO EN mm.

ALTO	Ancho	UTP CAT 6	UTP CAT 6A
54	100	0- 86	0 – 53
	150	87- 129	54 – 80
	200	130 – 172	81 – 107
	250	173 – 215	108- 133
	300	216 – 258	134 – 160
	350	259- 301	161 – 186
	400	302 – 344	187 – 213
	450	345 - 387	214 – 240
	500	388 – 430	241 – 266
	550	431 – 473	267 – 293
600	474 - 516	294 - 320	

ALTO	Ancho	UTP CAT 6	UTP CAT 6A
105	100	0 – 167	0 – 104
	150	168 – 251	105 – 155
	200	252 -334	156 – 207
	250	335 – 418	208 – 259
	300	419 – 501	260 – 311
	350	502 – 585	312 – 363
	400	586 – 668	364 – 414
	450	669 – 752	415 – 466
	500	753 – 836	467 – 518
	550	837 – 919	519 – 570
600	920 - 1003	571 - 622	

ALTO	Ancho	UTP CAT 6	UTP CAT 6A
150	100	0 – 239	0 – 148
	150	240 – 358	149 – 222
	200	359 – 477	223 – 296
	250	478 – 597	297 -370
	300	598 – 716	371 – 444
	350	717 -836	445 – 518
	400	837 – 955	519 – 592
	450	956 – 1074	593 – 666
	500	1075 – 1194	667 – 740
	550	1195 – 1313	741 – 814
600	1314 - 1432	815 – 888	

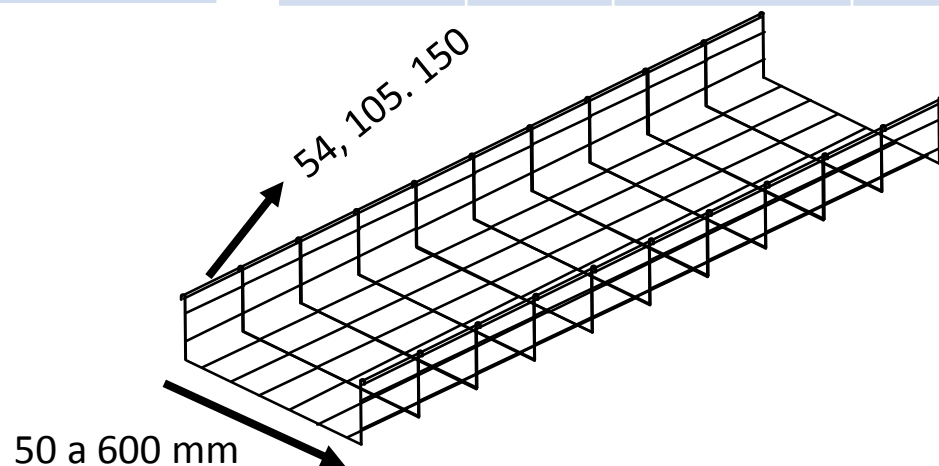


CAPACIDAD DE CABLEADO EN KG.

ALTO	Ancho	Separación de apoyos	
		1.5m	1.8m
33	50	18	13
	100	24	17
	150	31	24
	200	34	27
	300	59	47


ALTO	Ancho	Separación de apoyos	
		1.5m	1.8m
66	50	25	18
	100	30	22
	150	45	35
	200	50	39
	250	68	56
	300	87	72
	400	176	89
	500	188	97
	600	201	107
	700	213	115

ALTO	Ancho	Separación de apoyos	
		1.5m	1.8m
116	150	70	54
	200	82	66
	300	165	88
	400	188	95
	500	208	104
	600	227	121

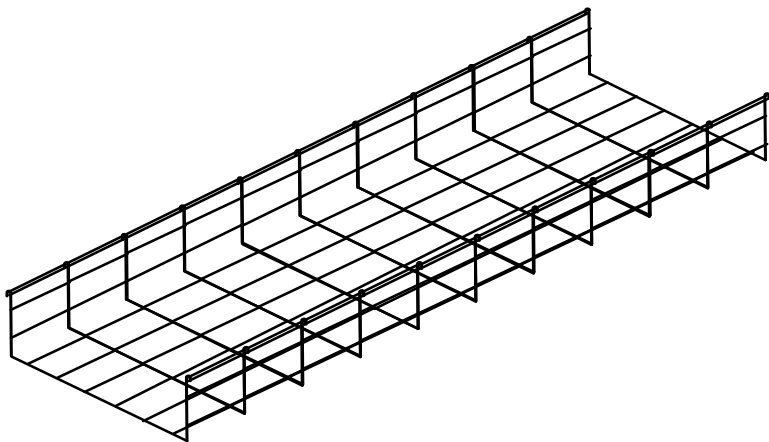


UNIÓN DE CHAROLAS

Cantidad de clemas utilizadas	
Ancho	Kit 1
50	2
100	2
150	3
200	3
250	4
300	4
400	4
500	4
600	5
700	5




op. (2)	
Ancho	Clip recto
50	2
100	2
150	2
200	3
250	3
300	3
400	4
500	4
600	4
700	5



Cantidad de mini-clips utilizados	
Ancho	Mini Clip
100	2
200	2
250	2



Cantidad de Clip automáticos utilizados		
Ancho	Clip Aut	Kit 1
300	2	
400	2	
500	2	
600	2	2
700	2	2





CURVAS OP. 1

Curvas 90°		
Ancho	Kit 1	Curvas x tramo
50	1	3
100	2	3
150	3	2
200	4	2
250	5	1
300	6	1
400	7	1
500	9	1
600	11	1

Curvas 45°				
Ancho	Kit 1	Kit 2	ED275	Curvas x tramo
50		2	1	4
100	1			3
150	1	2	1	3
200	2			3
250	2	2	1	1
300	3			1
400	3	2	1	1
500	4	2	1	1
600	5	2	1	1
700	6	2	1	1






CURVAS OP. 2

Curvas Prefabricadas 90° ó 45°	
Ancho	Accesorios
50	0
100	0
150	0
200	0
250	0
300	0
400	0
500	0

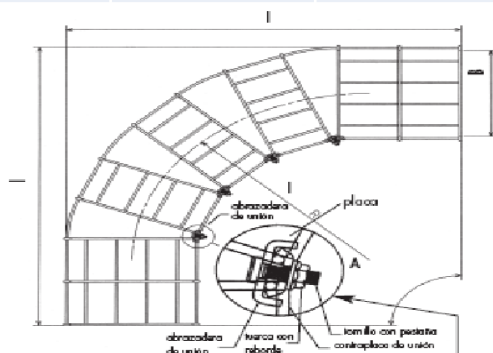

"T"			
Ancho	Kit 1	Kit 3	ED275
50	3		
100	3		
150	3		
200	3		
250	3		
300	2	4	2
400	2	4	2
500	2	4	2
600	2	4	2
700	2	4	2


"X"			
Ancho	Kit 1	Kit 3	ED275
50	6		
100	6		
150	6		
200	6		
250	6		
300	4	8	4
400	4	8	4
500	4	8	4
600	4	8	4
700	4	8	4

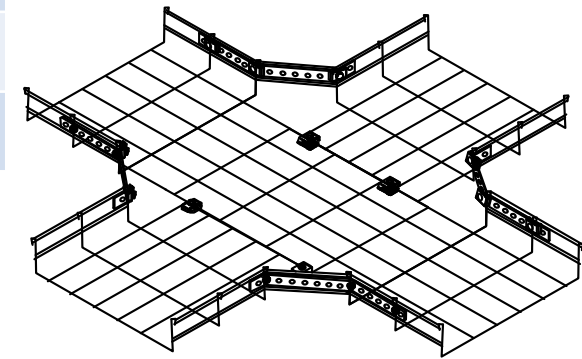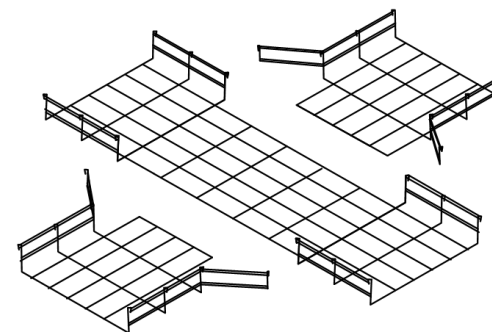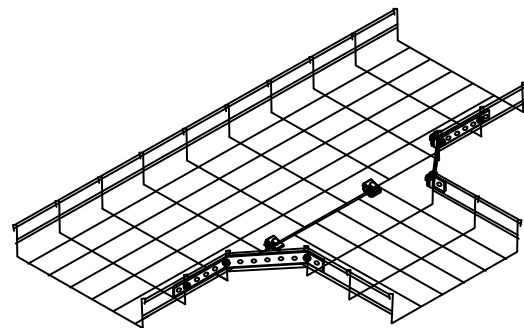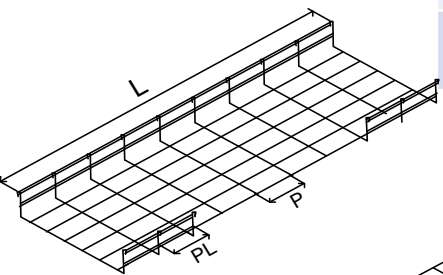

DESCRIPCIÓN KIT'S DE CLEMA.


KIT 1 (MG-51-KIT1EZ)

NO. PARTE	DESCRIPCIÓN
MG-51-420EZ	CLEMA MEDIANA
MG-51-421EZ	CLEMA PEQUEÑA
MG-66-603EZ	TORNILLO & TUERCA



KIT 2 (MG-51-KIT2EZ)

NO. PARTE	DESCRIPCIÓN
MG-51-420EZ	CLEMA MEDIANA
MG-51-422EZ	TORNILLO ENCASTRADO



KIT 3 (MG-51-KIT3EZ)

NO. PARTE	DESCRIPCIÓN
MG-51-421EZ	CLEMA PEQUEÑA
MG-51-420EZ	TORNILLO & TUERCA

